


SPRZĘGŁA HYDRAULICZNE SH 100 - 800

parametry pracy do 110⁰C / 6 bar

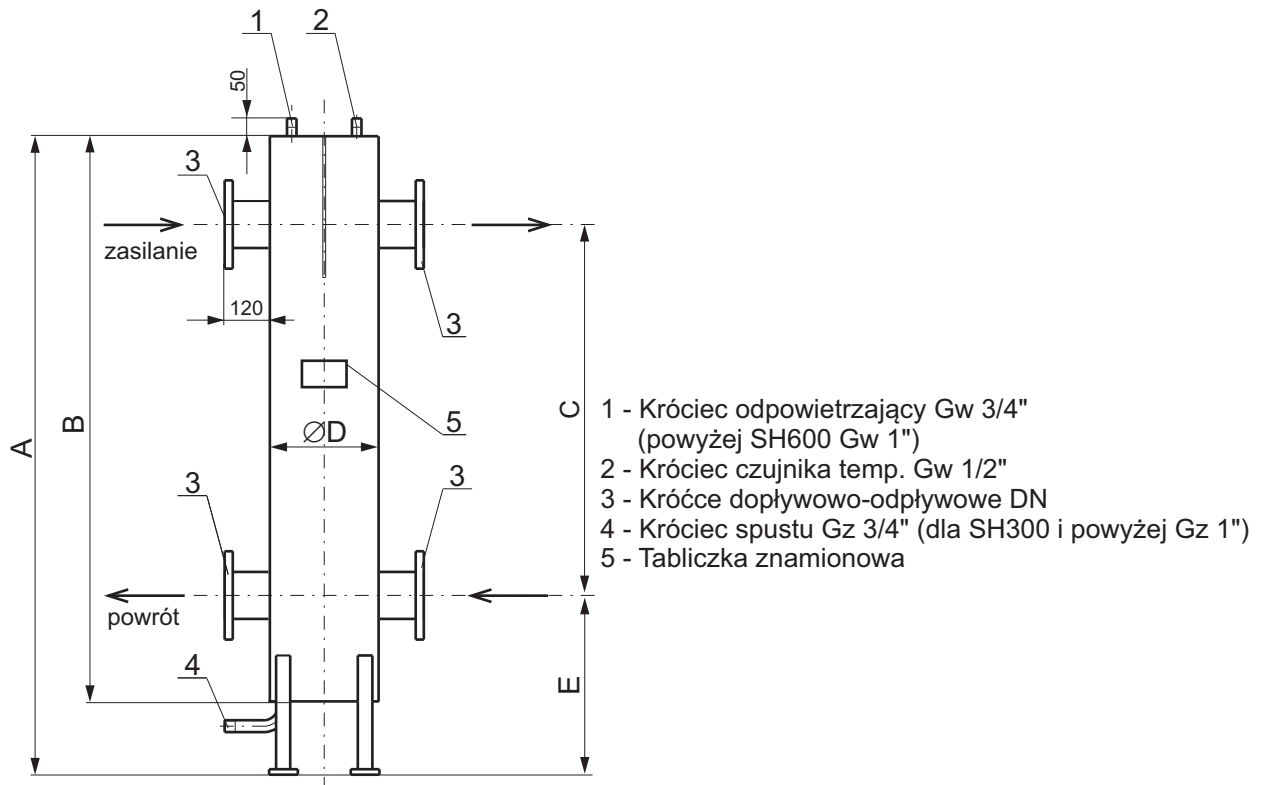

Typ sprzęgła hydraulicznego	V dm ³	Zakres mocy kotłów [kW]	Zakres wydajności [m ³ /h]	Wymiary w mm					
				∅D	dn	A	B	C	E
SH 100	4	70-105	4-6	108	50	680	480	300	300
SH 150	12	105-210	6-12	150	65	920	720	450	350
SH 200-80	30	210-315	12-18	200	80	1160	960	600	400
SH 200-100	33	315-390	18-22	200	100	1260	1060	700	400
SH 250	60	390-610	22-35	250	125	1550	1350	900	450
SH 300-125	107	445-770	35-44	300	125	1820	1620	1080	500
SH 300-150	110	770-890	44-61	300	150	1890	1690	1150	500
SH 350	170	890-1200	61-69	350	150	2090	1890	1260	550
SH 400	250	1200-1580	69-90	400	200	2410	2160	1440	650
SH 450	360	1375-1980	79-113	450	200	2680	2430	1620	700
SH 500	495	1980-2460	113-141	500	250	2950	2700	1800	750
SH 600	850	2460-3550	141-203	600	300	3450	3200	2100	850
SH 800	1630	3550-5300	203-350	800	350	3650	3400	2200	850